

FIG. 1 is a top view of a rectangular plate 20 with a grid of circular features 22. The plate has a central rectangular area 24 and four corner tabs 26. The grid consists of 4 rows and 6 columns of circular features 22. The central area 24 is defined by the inner edges of the grid. The corner tabs 26 are located at the corners of the plate 20.

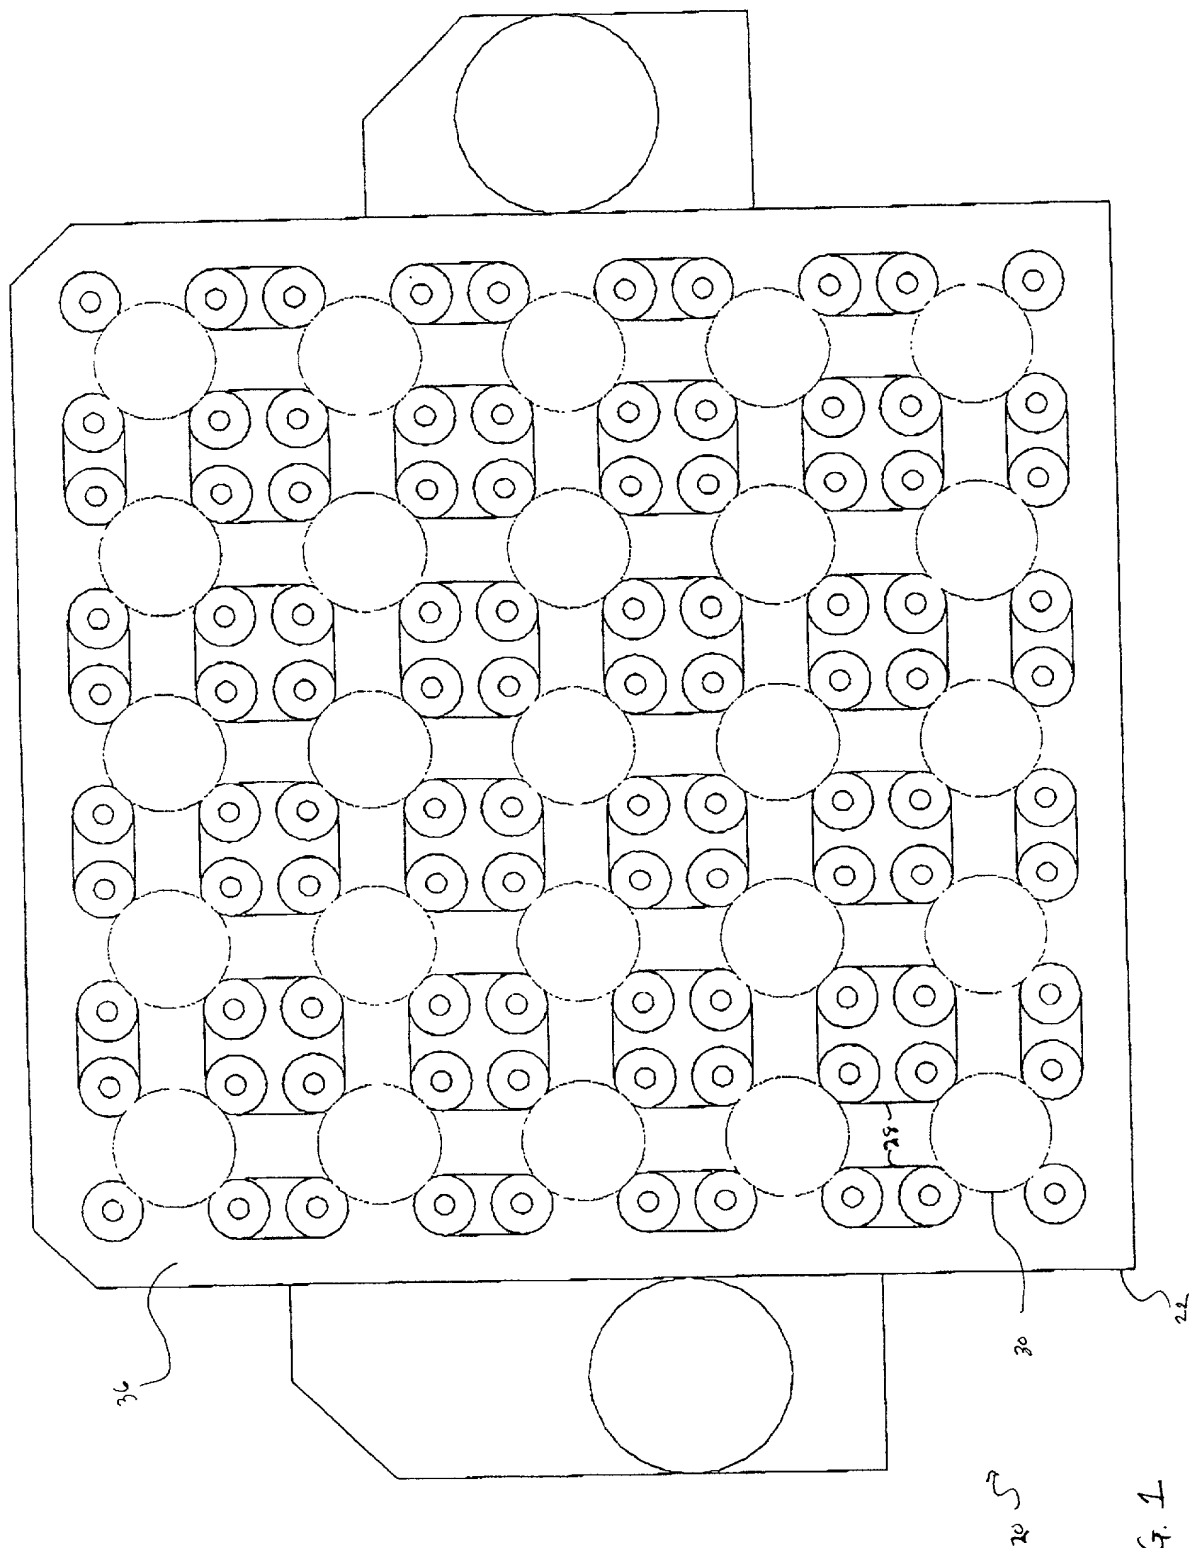


FIG. 1

FIG. 2

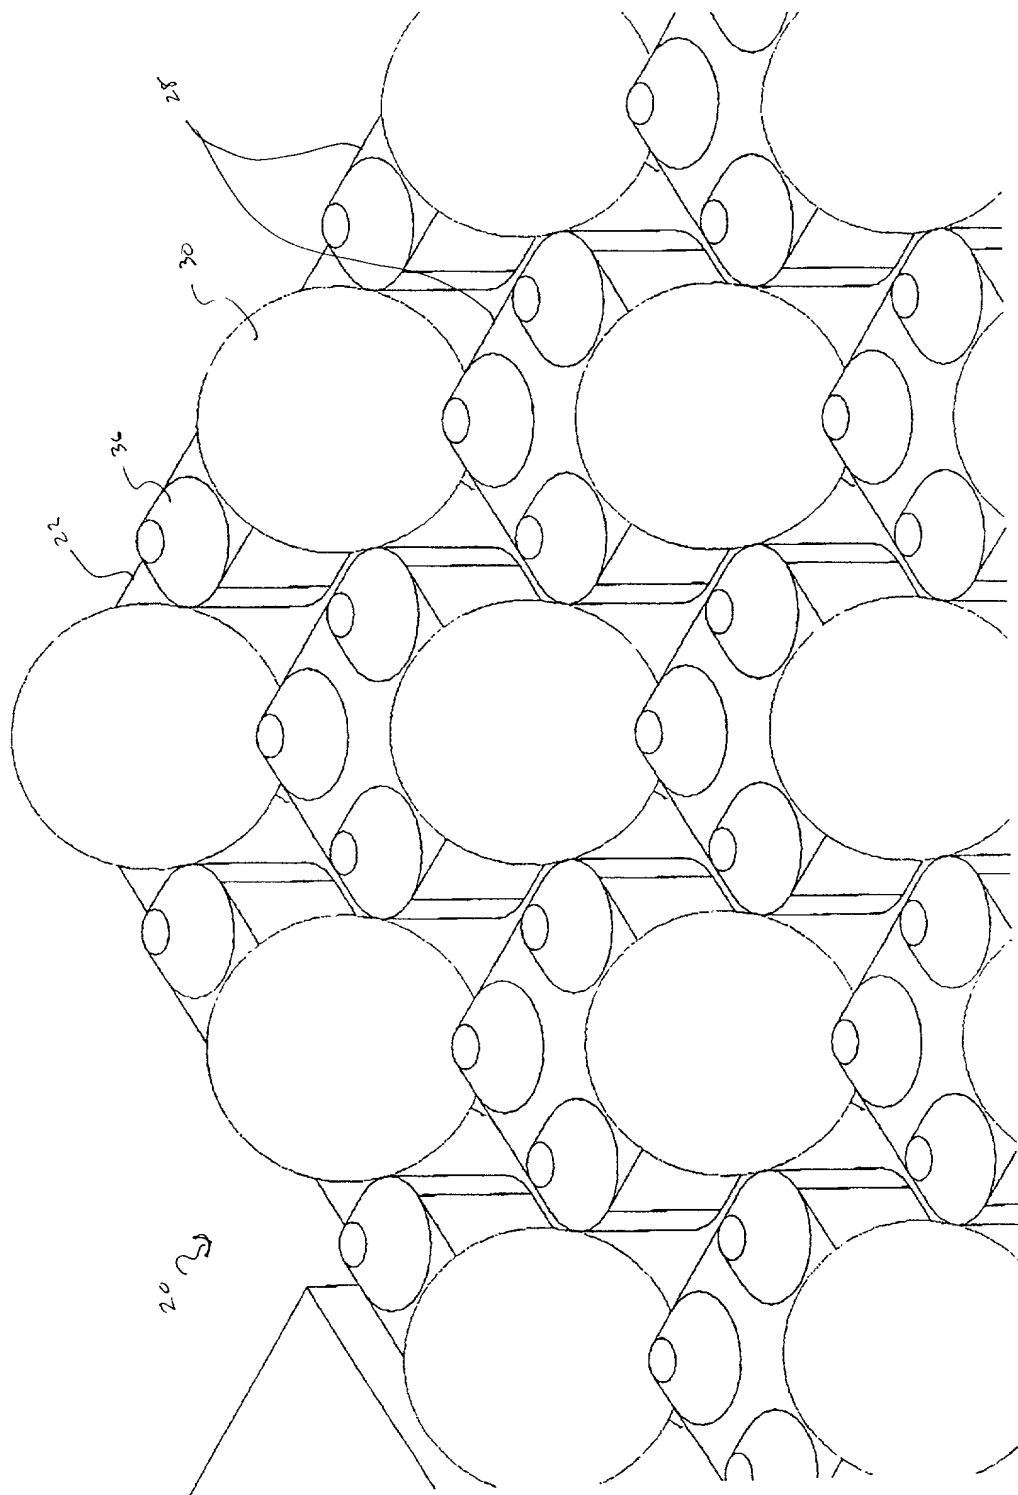


FIG. 3 is a perspective view of the device of FIG. 1, showing the device in a closed position. The device is shown in a perspective view, and the components are labeled with reference numerals. The device is shown in a perspective view, and the components are labeled with reference numerals.

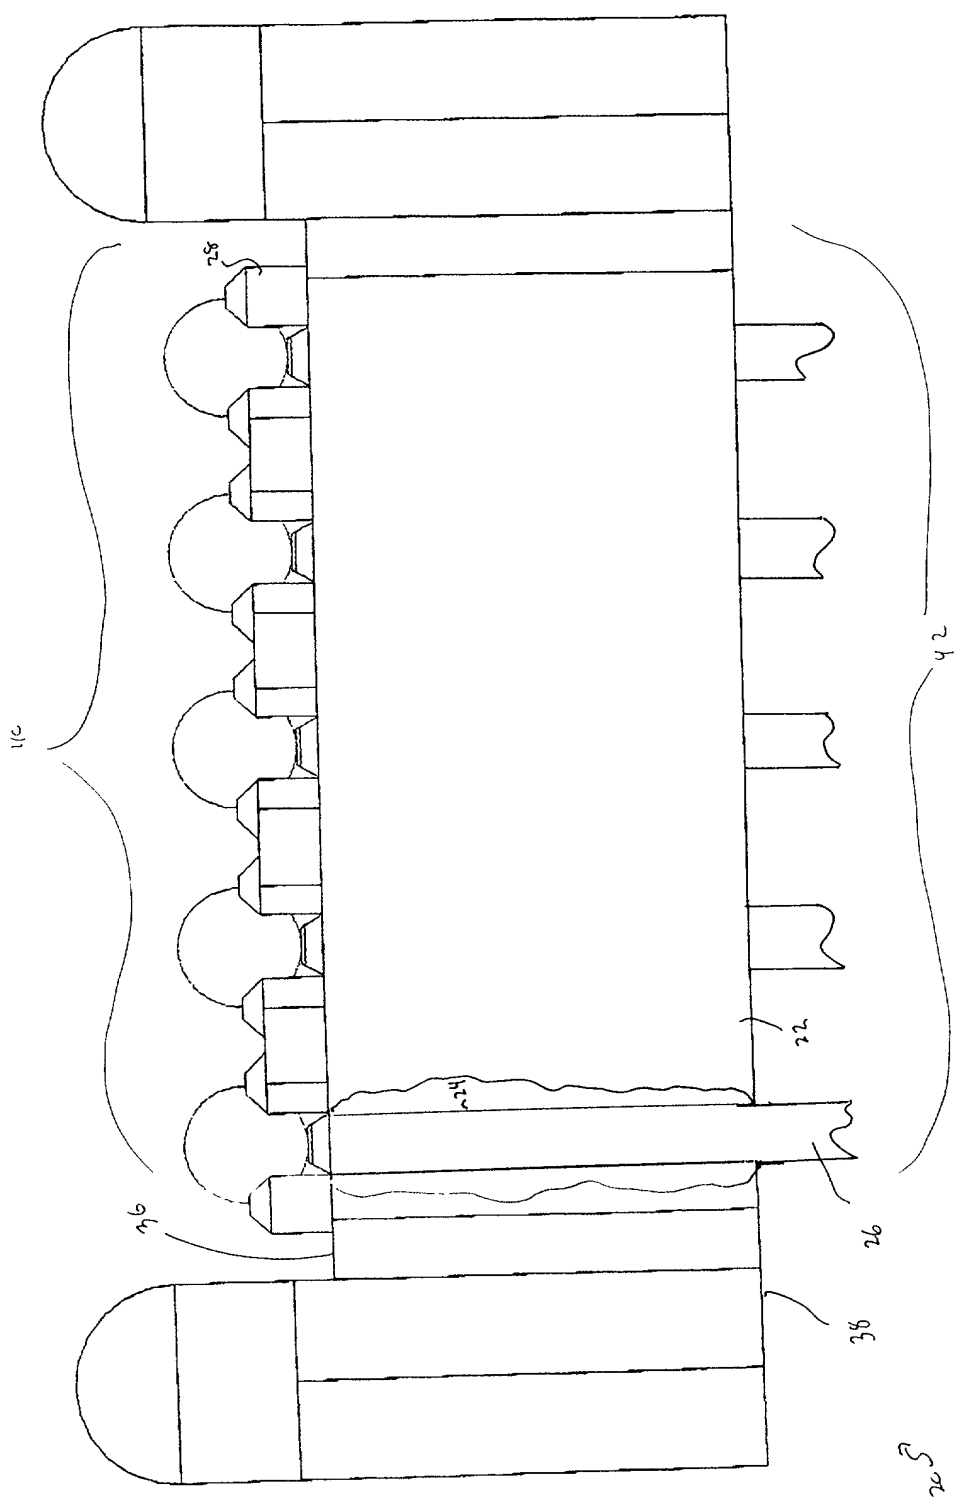


FIG. 3

Fig. 4

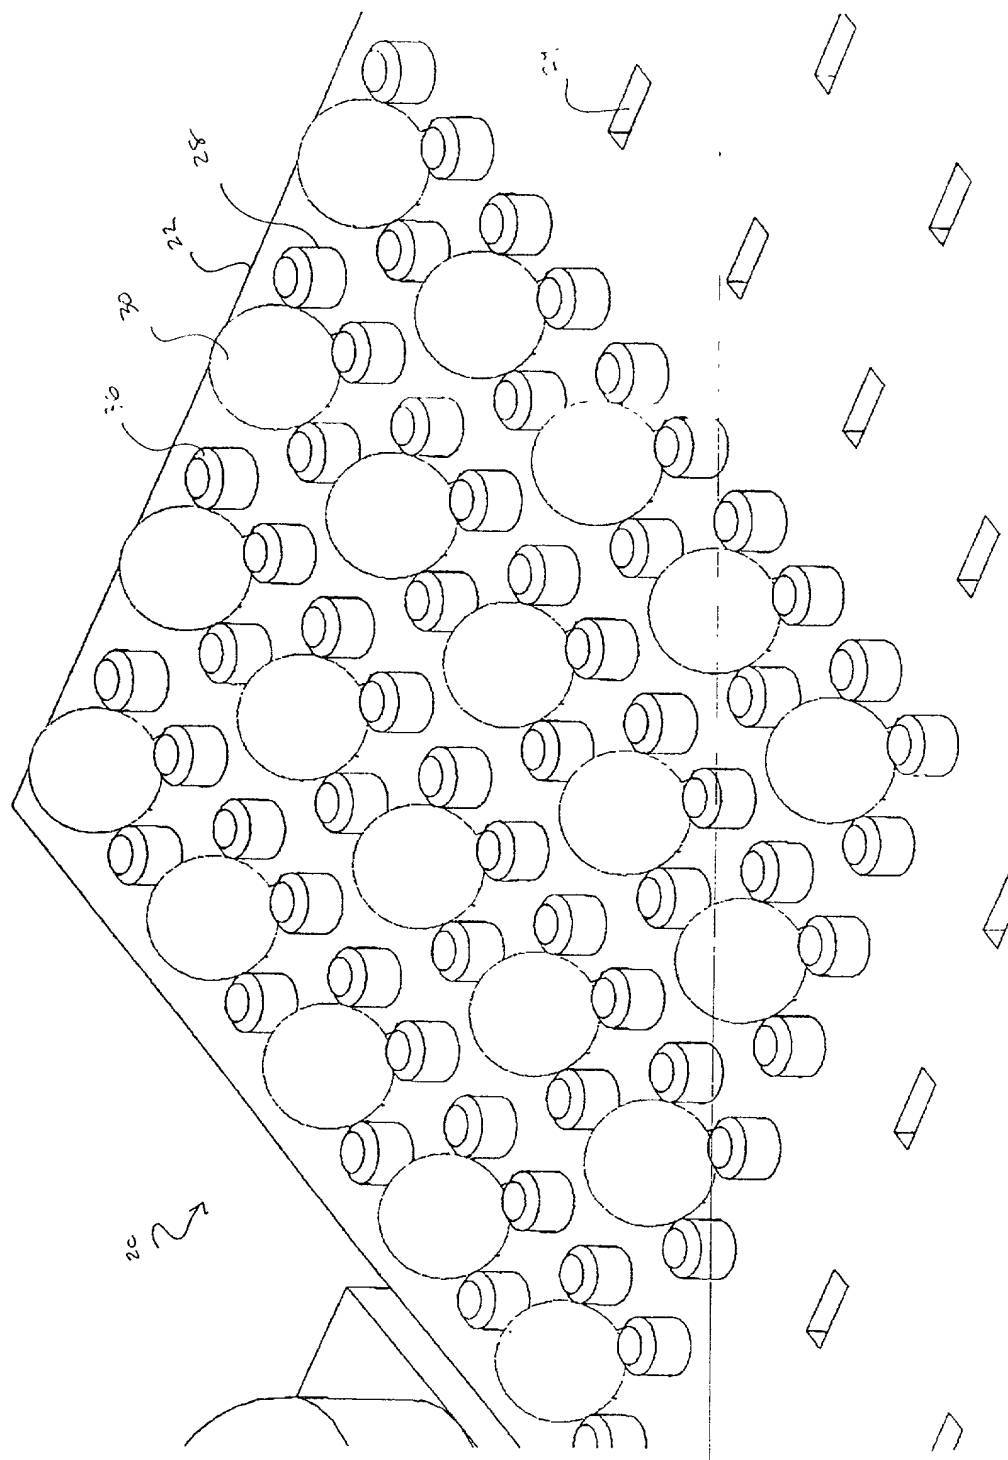


FIG. 5

